LEO 350-360 W

The durable one. For a green planet.



GENERATE MORE POWER

Shows an extremely high resistance to degradation phenomena (PID & LeTID).



EXTREMELY WEATHER RESISTANT

Certified to withstand 8100 Pa Snowload & 3600 Pa Windload & 40 mm Hailstones (Hail-Class 4).



Certified to perform in coastal areas (salt-mist), deserts (dust) and farmland (ammonia).



Packed upright, avoiding the emergence of microcracks and thus ensuring factory quality at the place of delivery.

MAXIMUM USE OF SPACE

LEO-Panels with 108 & 96 cells can be combined without add-ons. For maximum energy generation on the roof.

A SUSTAINABLE CHOICE

A premium product, which lasts for decades. Manufactured according to rigid environmental standards. Produced with 100 % green electricity.

MADE IN GERMANY!

Right here. In Prenzlau. In our production facility. Here we manufacture under the aspects of quality & durability since 2001.

FULL SERENITY

Years linear Power Guarantee



Years

Product Warranty

100% cost recovery of guarantee claims.

Under the terms and conditions of the respective guarantee certificate.

QUALITY UNDER HAND AND SEAL (PVEYELE WE)












aleo solar panel LEO 350-360W Premium

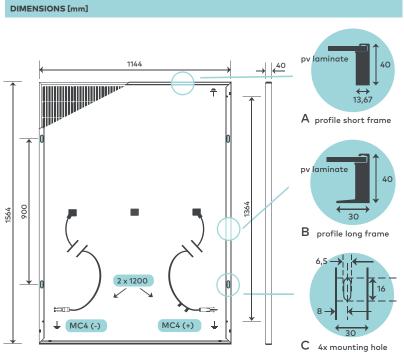

ELECTRICAL DATA (STC)			L62S350	L62S355	L625360
Rated power	P_{MPP}	[W]	350	355	360
Rated voltage	$V_{\rm MPP}$	[V]	27.47	27.66	27.85
Rated current	I _{MPP}	[A]	12.74	12.83	12.92
Open-circuit voltage	V_{oc}	[V]	32.82	32.94	33.06
Short-circuit current	I _{sc}	[A]	13.34	13.44	13.53
Efficiency	η	[%]	19.6	19.8	20.1

Electrical values measured under standard test conditions (STC): 1000 W/m²; 25 °C; AM 1.5

ELECTRICAL DATA (LOW II	RRADIAI	NCE)	L62S350	L62S355	L62S360
Power	P_{MPP}	[W]	67	68	69

Electrical values measured under: 200 W/m²; 25 °C; AM 1.5 Measurement tolerance of P_{MPP} under STC -3/+3 % Accuracy of other electrical values -10/+10 %

Efficiency related to gross module area

CLASSIFICATION Classification range (positive classification) [W] 0/+4.99

CERTIFICATIONS	
Fire Resistance	Class C
Protection Against Electric Shock	II
IEC 61215:2021, IEC 61730:2016 inclu	ding:
- IEC 62804 - PID Resistance	

- IEC/TS 62782:2016 - Dynamic mechanical load testing IEC 62716 – Ammonia Resistance

LeTID Resistance

IEC 61701 – Salt mist Resistance

IEC 60068-2-68:1994 - Sand- and Dust test

Hail resistance class 4 (40 mm hailstones)

Snail trail free (AgNP Test)

System Certifications acc. to DIN EN ISO 9001:2015, 14001:2015, 50001:2018 and DIN ISO 45001:2018

BASIC MODULE DATA		
Length x width x height	[mm]	1564 x 1144 x 40
Weight	[kg]	20.5
Number of cells		96
Cell size	[mm]	182 x 91
Cell material		Monocrystalline Si, PERC
Number of Busbars		10
Front sheet		3.2 mm Solar glass (TSG)
Back sheet		Polymer sheet, white
Frame material		Al alloy, black

BASIC DATA JUNCTION BOX		
3 parts junction box acc. to IEC 62790	[mm]	left & right: 62 x 58 x 14 middle: 49 x 55 x 14
Bypass diodes		3 (one per box)
IP class		IP68
Cable	[mm]	1200 (+), 1200 (-) acc. to EN 50618
Connectors		genuine MC4 acc. to EN 62852


LOADS			
Max. module pressure load (Testload)		[Pa]	8100¹
Max. module pressure load (Designload) ²		[Pa]	5400¹
Max. module suction load (Testload)		[Pa]	3600¹
Max. module suction load (Designload) ²		[Pa]	2400¹
Max. system voltage		$[V_{DC}]$	1000
Reverse current load	I _R	[A]	25

Mechanical load acc. to IEC/EN 61215:2021 ¹ Please observe the mounting conditions in ² Testload/Safety factor 1.5 = Designload the installation manual

TEMPERATURE COEFFICIENTS			
Temperature coefficient I_{sc}	a (I _{sc})	[%/K]	+0.03
Temperature coefficient $V_{\rm oc}$	ß (Voc)	[%/K]	-0.26
Temperature coefficient P_{MPP}	Y (P _{MPP})	[%/K]	-0.34

GUARANTEES	
Product Guarantee	25 years
Power Guarantee	25 years – linear

PERFORMANCE GUARANTEE

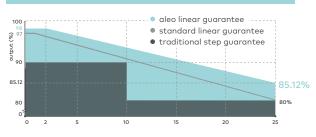

ALEO SOLAR GMBH

Marius-Eriksen-Straße 1 17291 PRENZLAU **GERMANY**

CONTACT

www.mdacapitalinvest.com info@mdacapitalinvest.com +420 773 988 087

GET THE BEST DEALS ON OUR HIGH-QUALITY ALEO SOLAR PANELS WITH THE MOST ADVANCED ENERGY SOLUTIONS



©aleo solar GmbH 2022